You Want What? Productions, INC 2879 S Tejon St Englewood, CO 80110 Office # 303-744-6465 nick@ywwproductions.com



The Magnificent Module

Standard (Zig-Zag) Setup Instructions

Step 1:

Stand two panels up next to each other in a "V" formation, with the "Top" Indicator on each panel at the top. This Unit will become the top of your Mag Mod Stack (Image 1)



*If the Hinges Don't Line up or are too Tight. Loosen the Screws on the Hinge insert the R-Clip then Tighten the Screws back down



Step 2:

Insert Cotter Pin R-Clips into the loose pin hinges that line up on the vertical seam of the "V" stack. Always Insert From the Top (Image 2)

Step 3: Repeat these steps to build Subsequent "V"s Behind the First Unit. Keep in mind the Final set up of the stage to determine which Panels are used in the Stack (Image 3)



Step 4: Install a Safety Rope on the Back "V" Unit Using the bottom Hinges. This Unit will become the Bottom of a Stack (Image 4)



Never move a stack without a safety rope. If the Stack Opens Flat the Top Panels will Fold Back Down and Ruin your Day

^{*}Insert Clips from the Outer Edge Toward the Middle Hinges

Step 5:

With 3 people, one at each end and one at the point of the Front "V" unit, Lift that unit onto the unit behind it and line up the loose Pin Hinges (Keep in Mind you Can't Open the "V" to Flat) (Image 5)



Step 6:


Insert Cotter Pin R-Clips Along the Horizontal Seam, Attach Velcro Light Leak Covers on all Vertical & Horizontal Seams. Make sure all Light Leaks are as Flat as Possible (Images 6 & 7)





*Insert Clips from the Outer Edge Toward the Middle Hinges

Step 7: Repeat the Lifting Steps to Reach the Desired Height of the Stack, 5 Panels or 20' Tall Max. (Images 8)

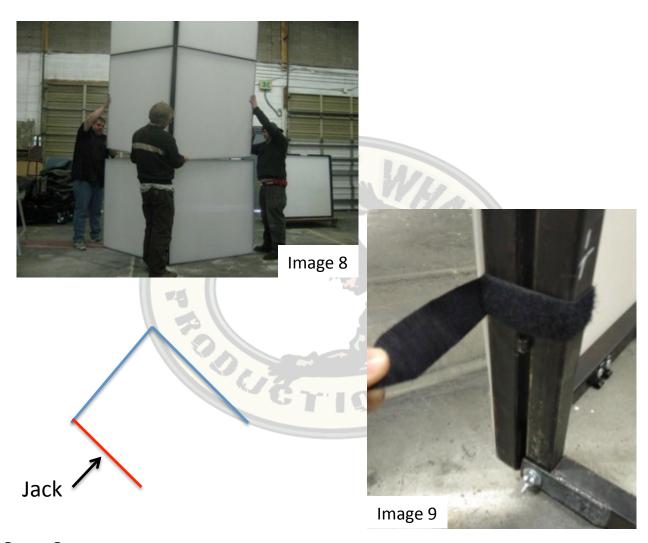

Step 8:

Build the desired number of "V" stacks then Move them into place for the stage. Adjacent Stacks can be Velcro cinched to each other if desired

Step 9:

Any stack taller than 12' requires a jack for safety. Each Jack can be Velcro cinched to the "V" stack, 1 Strap per Panel. (Images 9)

Step 10: After Set is Assembled Double Check that the Set looks like the Design then Dust all Panels for Best Lighting Results (Images 10)



Helpful Tips

*Don't lay panels flat on the floor and don't step or kneel on them. This would result in damage to the corrugated plastic sheet. If this does happen replace the panel with the provided spares. Any Major Damage could incur Additional charges for the Rental *Use Pliers to Remove Pins During Strike

*Follow the installation steps backwards in order to strike safely and avoid any damage to any of the supplied hardware *If there are any issues or Questions with your Install please call our Office Line 303-744-6465